
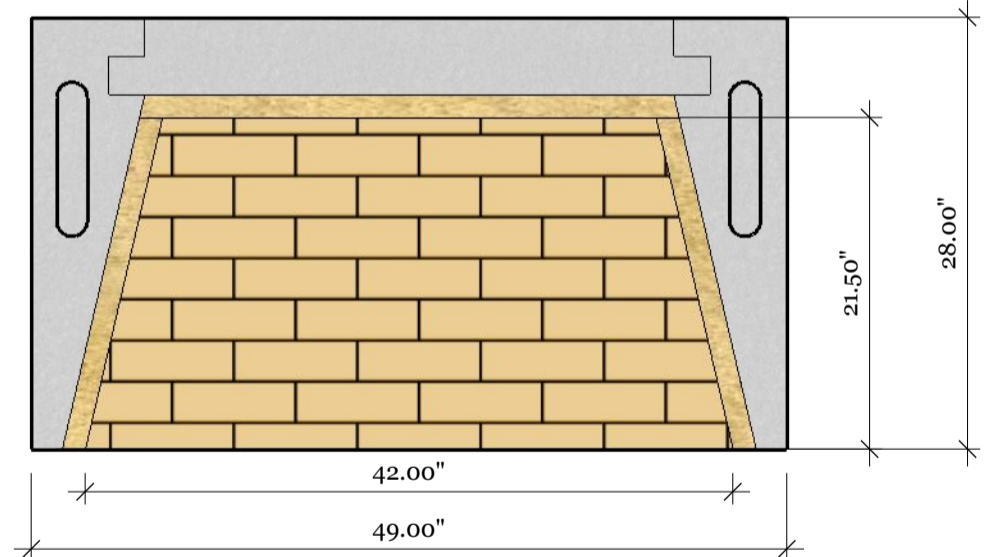
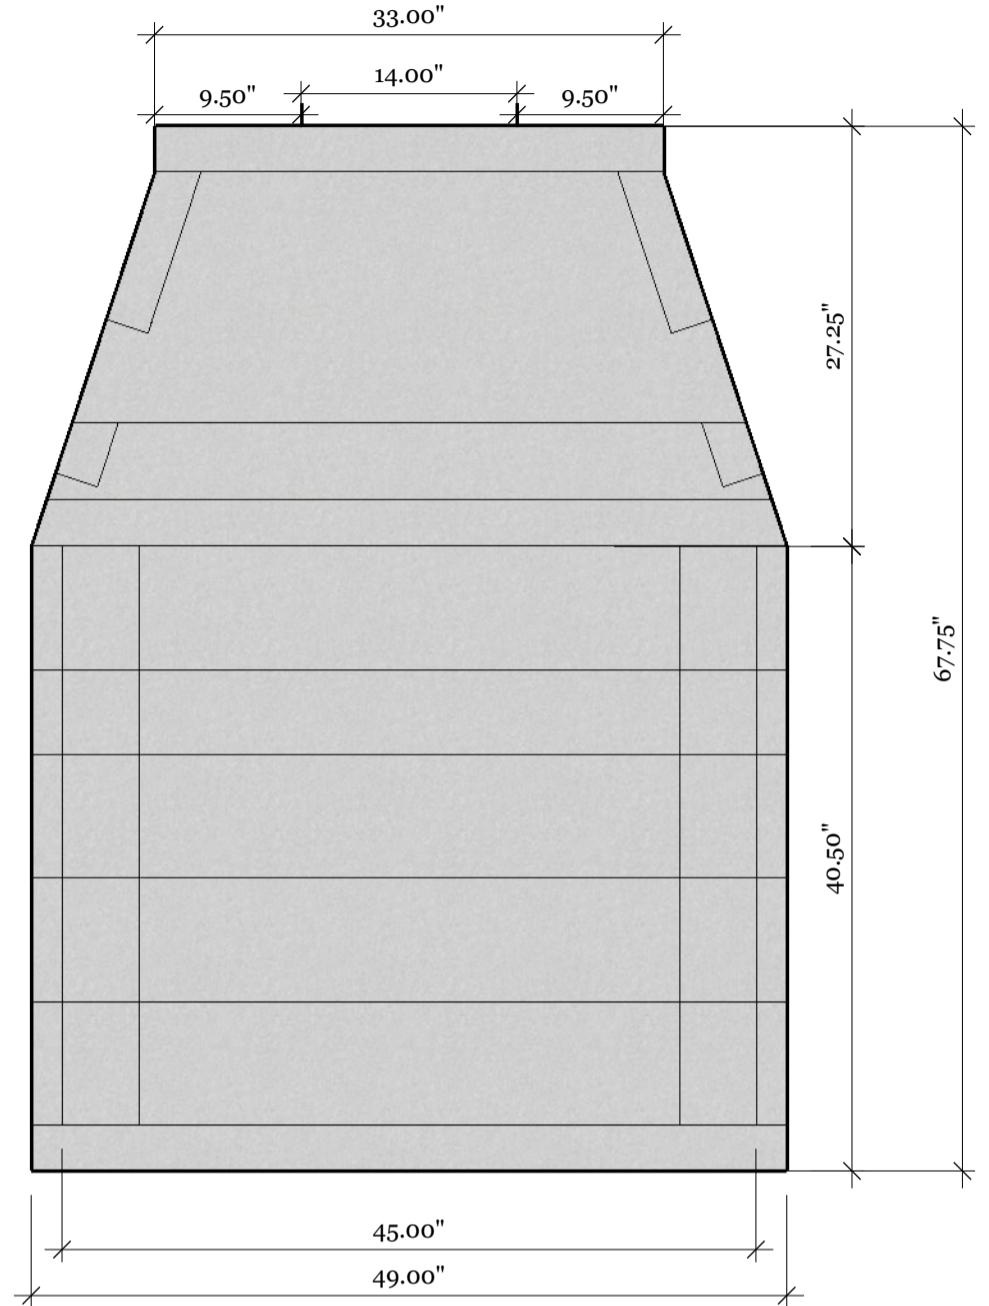


# MASON-LITE

by MFI • Masonry Fireplace Industries, Inc

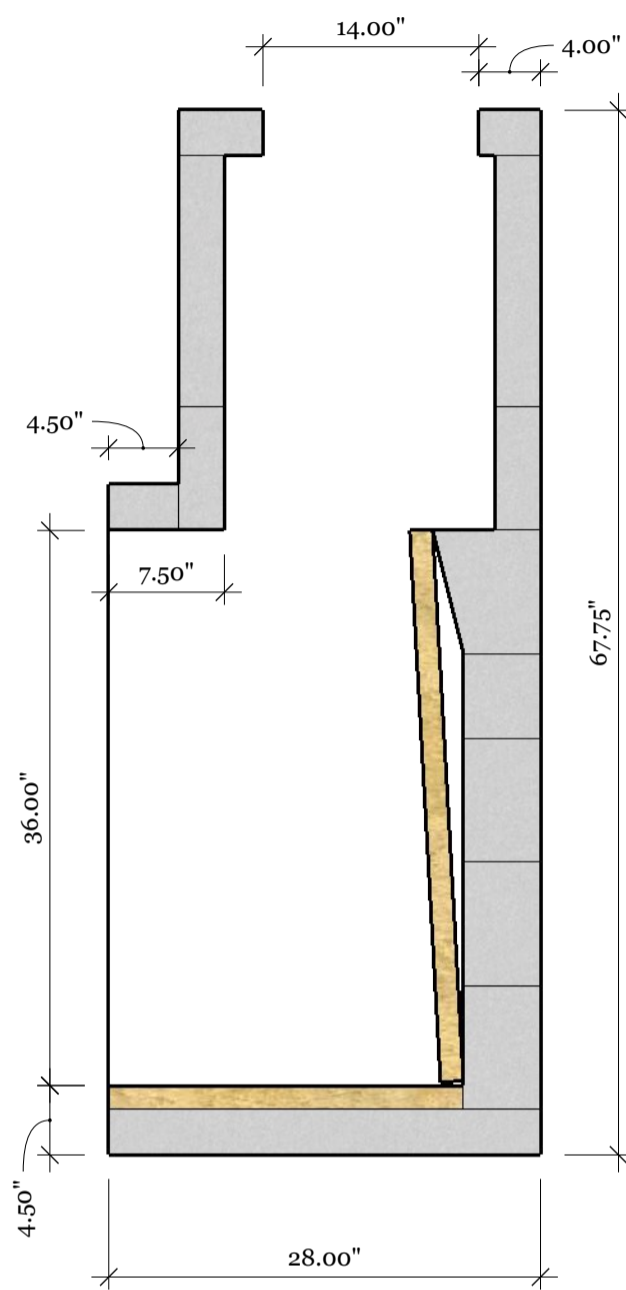

Note: This unit is designed in accordance with our units previously tested under UL127. Before placing an order, contact your local building department for applicable federal, state, and local laws and regulations required for installation. This drawing may not be drawn to scale. The dimensions of this unit have been calculated to include space for approx. 1/8" mortar joints between Mason-Lite pieces. (Larger mortar joints will cause inconsistent dimensions). Firebrick panels are not available for these units, 2 1/2" firebrick with a 1/2" fire mortar joint is required for these units. We do not supply the angle iron for lintel support required with these units, see [www.mason-lite.com/custominstallation](http://www.mason-lite.com/custominstallation) for lintel options and more installation recommendations. Fireplaces may require more outside air than is available through the unit, we do not calculate nor provide additional outside air unless otherwise stated. Outside air kits are sold separately. Fireplace Accessories do not have a UL Listing which may be required by your building department. This fireplace is non-refundable and requires a 50% deposit on order and 50% upon shipment. Please sign and return a copy of this drawing when submitting your order. The quoted price will be valid for 6 months from the day it was quoted.

By \_\_\_\_\_ Date \_\_\_\_\_

### Clearances to Combustibles

Unit Sides & Rear	2"
Dome Sides and Rear	2"
Sheathing Above Opening	18"
Combustible Floors	8"
Sheathing or Trim to Opening Sides	8"

CQ Number	Rev. Date
<b>CQ5492</b>	<b>06/2/2022</b>